

# FURRION

## 5" WALL MOUNT SPEAKER


FS5X



- Audio optimized for recreational vehicles
- PP reinforced cone extends frequency response and minimizes distortion; this controls rigidity and internal damping and delivers high definition audio with a pure, distinct sound



# 5" WALL MOUNT SPEAKER | FS5X

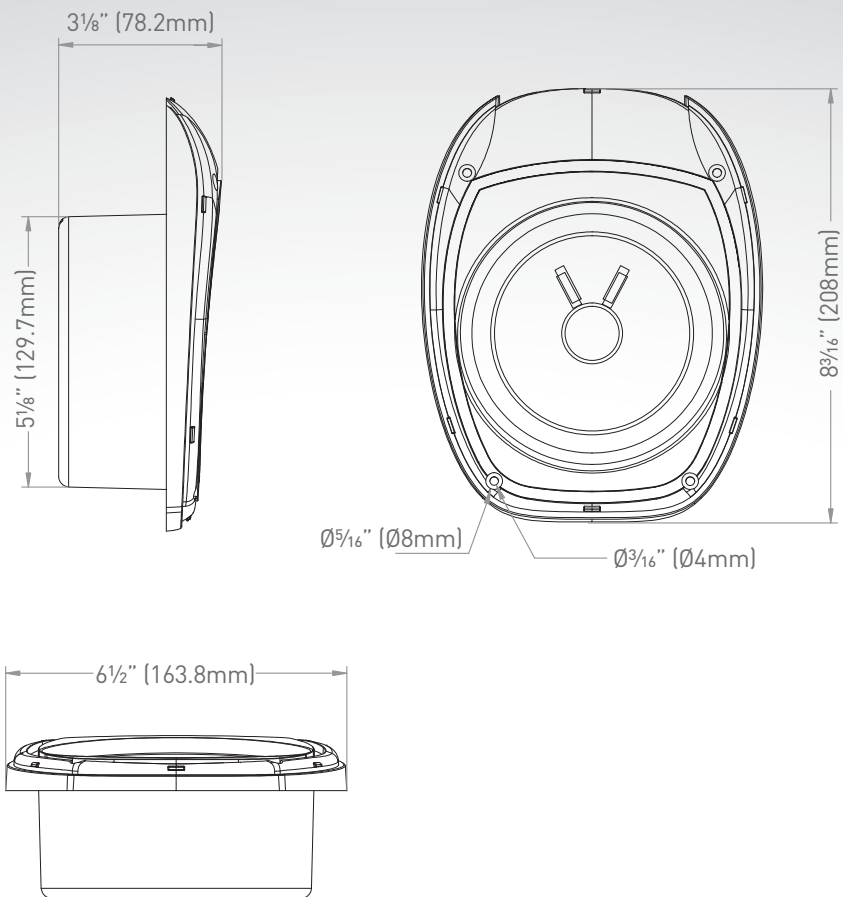

## Specifications

Voice Coil Electro Impedance	4Ω@1kHz 1V
Resonance Frequency	270±20% Hz
Output Sound Pressure Level	83dB
Characteristic Sensitivity	±3dB
Effective Frequency Band	Fo~18kHz
Harmonic Distortion	5% < 1W ≥ 270~10kHz
Power Usage	Left "+", Right "-"
Temperature Range	-20 °C to +70 °C
Max Power	30 W
Product Compatibility	Furrion stereo products

## Packaging Information

Packaging Type	Brown Box
Quantity (pcs)	1
Individual Packaging Dimensions (L x H x W)	6" x 4 7/16" x 2 7/8" (232 x 170 x 83mm)
Individual Packaging Gross Weight (kg/lbs)	1/2.20
Individual Packaging Net Weight (kg/lbs)	0.91/2.0

## Master Carton

Packaging Type	Master Carton Box
Quantity Per Box	12
Master Carton Dimensions (L x H x W)	19 3/16" x 14 11/16" x 10 7/8" (486 x 372 x 275mm)
Master Carton Gross Weight (kg/lbs)	13.3/29.3
Master Carton Net Weight (kg/lbs)	11.6/25.6